

Sterifast

SealPro

Heat sealer range

Parque Empresarial do Padrão, Lote 11, 5460-343 Boticas, Portugal | +351 276 418 287 | info@sterifast.com | www.sterifast.com


C-ST-SPG-2026-10

01 / OVERVIEW

The SealPro range at a glance

Sterifast SealPro heat sealers seal and print paper-plastic pouches and reels before sterilization. The range includes two manual models with integrated printing (SealPro 5 and SealPro 7) and two automatic models that feed, cut, seal and print (SealPro Auto 400 and 500).



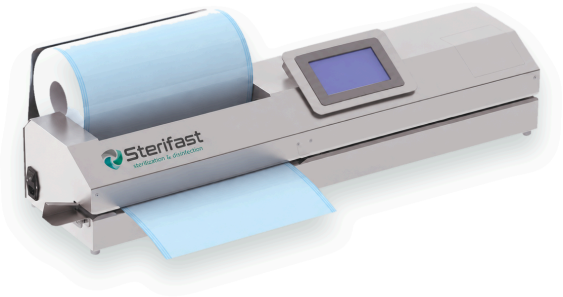

Highlights

Touch interface

Colour capacitive touch screens with a graphical interface.

Controlled temperature

Microcomputer control, adjustable from 60 to 220 °C.

Integrated printing

Expiry date and other data printed on the packaging during sealing.

From manual to automatic

Four models for different workloads.

02 / MODELS

Four models, one range




SealPro 5

Manual · 5" screen · carbon steel




SealPro 7

Manual · 7" screen · stainless steel · sealing data

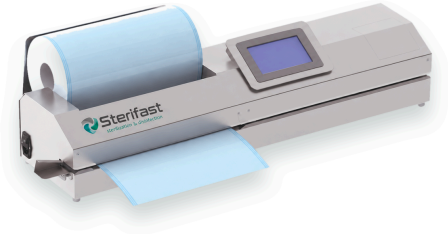

SealPro Auto 400

Automatic · cutting up to 400 mm

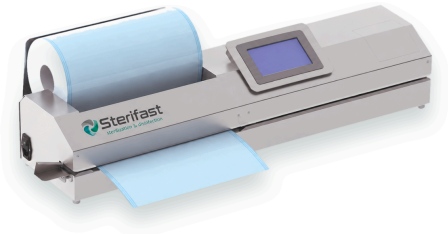

SealPro Auto 500

Automatic · cutting up to 500 mm

03 / COMPARISON

Model comparison

	SealPro 5	SealPro 7	Auto 400	Auto 500
Type	Manual	Manual	Automatic	Automatic
Screen	5"	7"	7" Android	7" Android
Housing	Carbon steel	Stainless steel	—	—
Data save/transfer	No	Yes	Automatic storage	Automatic storage
Automatic cutting	—	—	≤ 400 mm	≤ 500 mm
Sealing width	12 mm	12 mm	12 mm	12 mm
Sealing margin	0–35 mm	0–35 mm	0–35 mm	0–35 mm
Temperature	60–220 °C	60–220 °C	60–220 °C	60–220 °C
Power	500 W	500 W	600 W	650 W

04 / DATA SHEET

Data sheet by model

	SealPro 5	SealPro 7	SealPro Auto 400	SealPro Auto 500
Control system	5" colour touch screen	7" colour capacitive touch screen	7" capacitive screen (Android)	7" capacitive screen (Android)
Housing	Carbon steel	Stainless steel	—	—
Sealing width	12 mm	12 mm	12 mm	12 mm
Sealing margin	0–35 mm (adjustable)	0–35 mm (adjustable)	0–35 mm (adjustable)	0–35 mm (adjustable)
Working temperature	60–220 °C (adjustable)	60–220 °C (adjustable)	60–220 °C (adjustable)	60–220 °C (adjustable)
Sealing pressure	85 ± 15 N	85 ± 15 N	85 ± 15 N	85 ± 15 N
Max. cutting width	—	—	≤ 400 mm	≤ 500 mm
Cutting length	—	—	≥ 50 mm	≥ 50 mm
Power	500 W	500 W	600 W	650 W

Standards

Standards applicable to the SealPro range, according to the manufacturer's manuals.

ISO 11607-2 Validation requirements for sealing processes of packaging for terminally sterilized medical devices.

EN 868-5 Heat-sealable and self-sealable pouches and reels of paper and plastic film for medical devices to be sterilized.

ISO 15223-1 Symbols for labelling and information to be supplied by the manufacturer; printing characters follow these symbols.